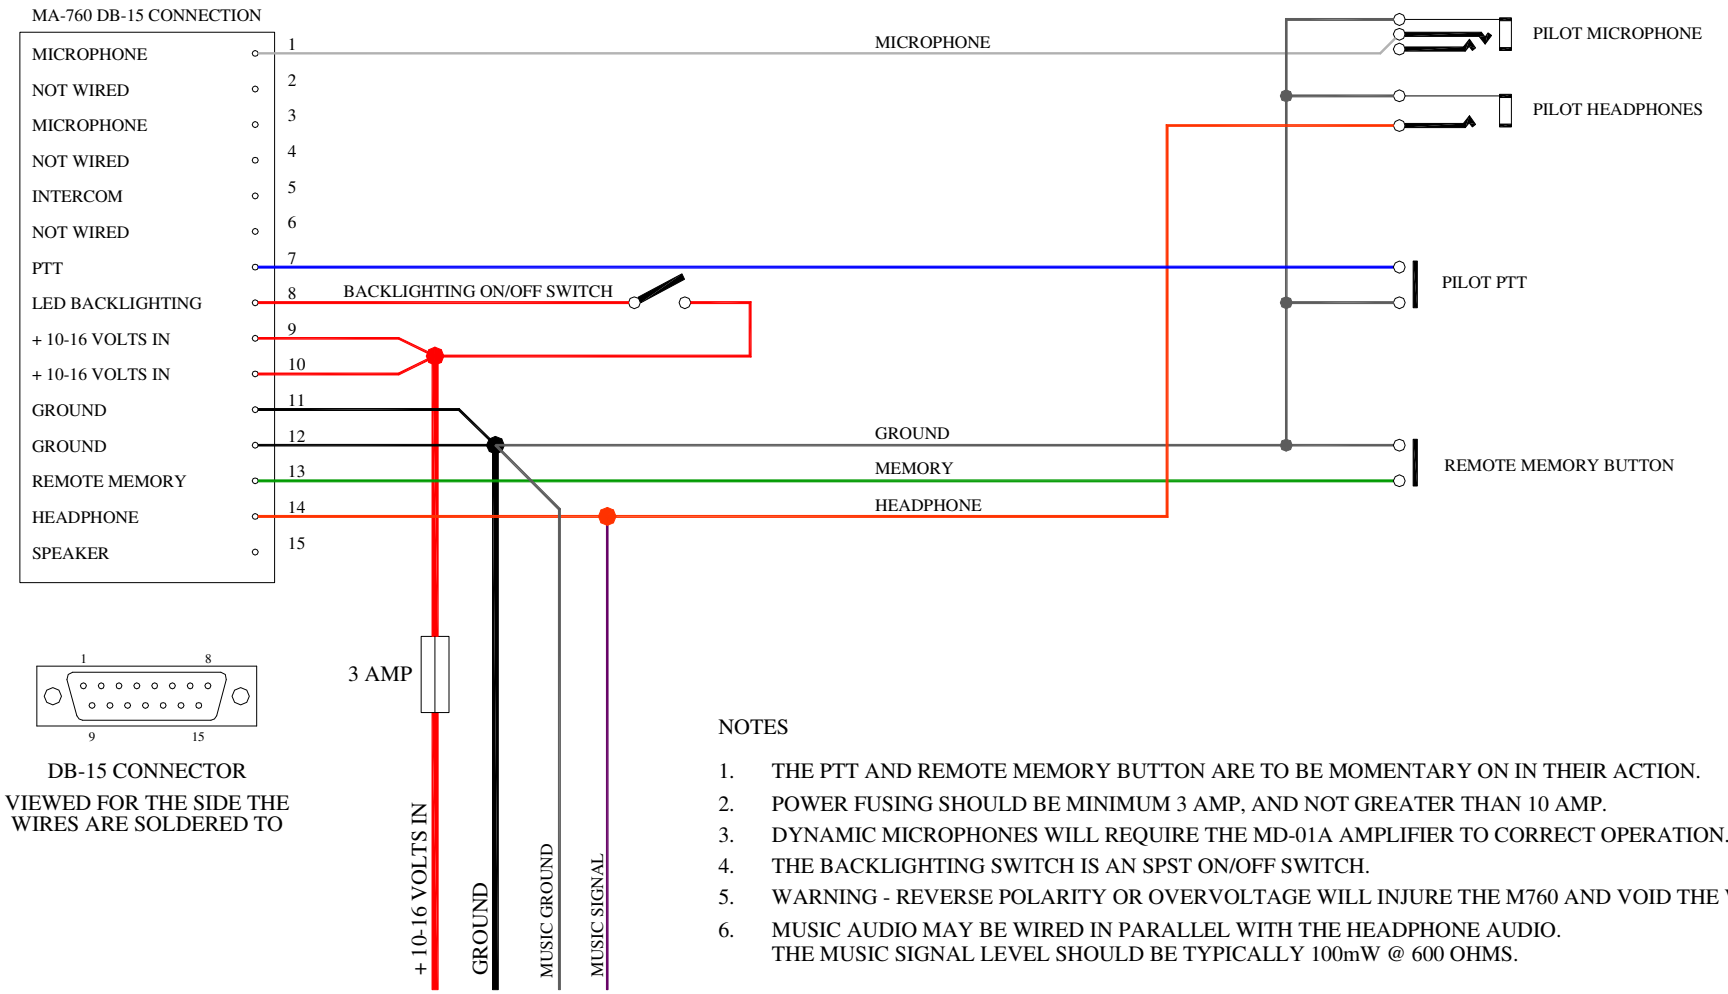

DB-15 CONNECTOR

VIEWED FOR THE SIDE THE WIRES ARE SOLDERED TO

NOTES

1. THE PTT AND REMOTE MEMORY BUTTON ARE TO BE MOMENTARY ON IN THEIR ACTION.
2. POWER FUSING SHOULD BE MINIMUM 3 AMP, AND NOT GREATER THAN 10 AMP.
3. DYNAMIC MICROPHONES WILL REQUIRE THE MD-01A AMPLIFIER TO CORRECT OPERATION.
4. THE BACKLIGHTING SWITCH IS AN SPST ON/OFF SWITCH.
5. WARNING - REVERSE POLARITY OR OVERVOLTAGE WILL INJURE THE M760 AND VOID THE WARRANTY.
6. MUSIC AUDIO MAY BE WIRED IN PARALLEL WITH THE HEADPHONE AUDIO.
   THE MUSIC SIGNAL LEVEL SHOULD BE TYPICALLY 100mW @ 600 OHMS.

MICROAIR M760 (REV N) TRANSCEIVER
WIRING DIAGRAM
SINGLE SEAT TRIKE INSTALLATION